


FINESSE Smart-Touch Motorized Drapery System

Sleek belt driven motorized drapery track can be easily curved to meet your installation requirements. Spans up to 19' unspliced and pulls up to 160lbs of fabric.

Features:


- Plug-n-Play installation, simple and quick.
- Ultra Quiet motor powered by safe low voltage current. Battery powered option available for flexibility of installation.
- **Track is available in the following colours: powder coated white, powder coated black and anodized aluminum, can be custom painted.**
- Smart-Touch technology will start the curtain motor in the desired direction by pulling the fabric edge by hand.
- Can be smoothly hand drawn in case of power failure.
- Built-in electronic processor provides automatic setting of travel limits with cushioned start/stop functionality. Two programmable presets (mid-way stops) are available for user convenience.
- System available with pinch pleat or Snap-On carriers.
- 6-channel RF remote control (optional with wireless timer) and 4-channel wireless wall switch work with every Finesse drape & shade system.
- Now offers Z-Wave+ technology for SmartHome and Voice control.
- Built-in contact closure port and additional RS485 interface on HD motor.
- Integrates with all major Automation systems.

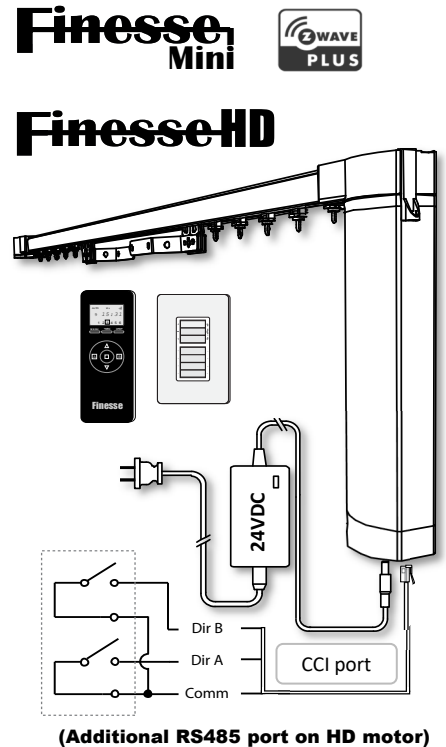

(Additional RS485 port on HD motor)

Specifications:

	Finesse HD	Finesse Mini	Finesse Li-Ion
- Rated Power:	24VDC/1.5A	24VDC/1.5A	12.6VDC/0.8A
- Rated torque:	2Nm	1.2Nm	1.0Nm
- Max Pulling Capacity:	160lbs	120lbs	75lbs
- Track profile: 1" x 1-1/4" aluminum extrusion 6063 T5			
- Transmission: 12mm polyurethane thermoplastic timing belt reinforced w/steel cords			
- Maximum system width unspliced: 229"			
- Maximum load capacity: 3lbs per carrier / total capacity depends on track width (please refer to capacity tables)			
- Bracket spacing: 20" standard (16" at stack recommended)			

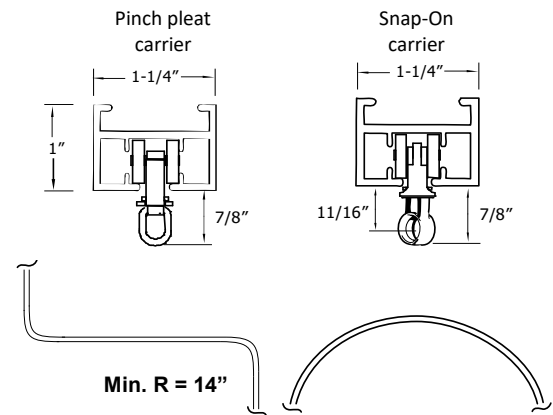


Bending / Curving:

Tracks can be curved to precise specifications, including single, multiple and reverse curves. Template required for bending - please refer to page 6 of this catalogue for instructions. Minimum radius for curve: 14"

8" bending radius is available on Finesse SlimLine Track system.

Finesse SlimLine



TEXTILE TRIMMINGS

Your Drapery Hardware Specialist

13040 Worster Court,
Richmond, BC, Canada, V6V 2B3
phone: 604-821-1188 / 888-982-0888
email: info@textiletrimmings.com
www.TextileTrimmings.com

